


Art. MLS/SFR

Art. OLI/SFR

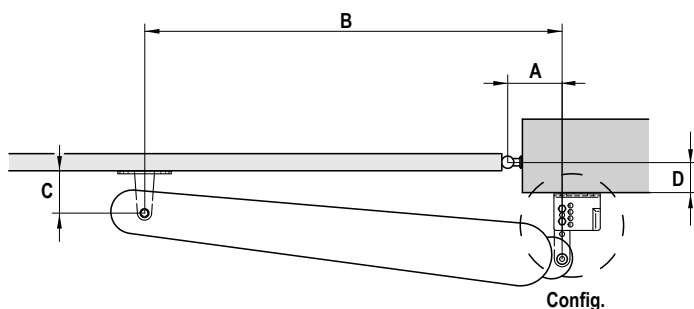

Art. LOOK 520			
Config. 1		Config. 2	
Art. LOOK 320 / MAC / STING		Config. 3	
Config. 1	Config. 2	Config. 4	

Art. OLI		
Config. 1	Config. 2	
		Si vous utilisez le trou F2, coupez le long de la ligne

LOOK 320						
	Config.	A	B	C	D	Note
90°	1	125	1100	94	0÷50	
	2	125	1100	94	50÷90	
95°	1	160	1100	94	0	
100°	2	160	1100	94	25÷30	

LOOK 520						
	Config.	A	B	C	D	Note
90°	1	125	1470	94	0÷150	
	2	125	1470	94	150÷200	
	3	125	1470	94	200÷230	
	4	125	1480	94	230÷270	
100°	2	200	1490	94	0÷120	
110°	2	200	1490	94	0÷50	
120°	2	240	1500	94	0÷25	

MAC / STING + Art. MAC_FM						
	Config.	A	B	C	D	Note
90°	1	125	685	94	0÷50	* Sans butée mécanique en ouverture : course maximale 367 mm.
	2	125	685	94	50÷75	
	2	140	685	109	75÷100*	
	2	140	685	114	100÷125*	
100°	1	160	690	104	0÷25*	

MAC / STING						
	Config.	A	B	C	D	Note
90°	1	125	720	94	0÷50	
	2	125	715	94	50÷100	
	2	150	715	124	100÷125	
100°	1	160	720	104	0÷25	
	1	170	720	109	25÷50	
110°	1	185	720	99	0	
	2	185	720	99	25	

OLI 270						
	Config.	A	B	C	D	Note
90°	2	125	1000	90	25÷45	

OLI 400						
	Config.	A	B	C	D	Note
90°	1	150	1260	110	25÷115	
	2	150	1260	110	115÷145	
100°	2	200	1260	90	25÷60	
110°	2	200	1260	90	25÷35	

DEA SYSTEM S.p.A.

Via Della Tecnica, 6 - 36013 PIOVENE ROCCHETTE (VI) - ITALY

tel: +39 0445 550789 - fax: +39 0445 550265

Internet: <http://www.deasystem.com> - E-mail: deasystem@deasystem.com